

PROJECT: \_\_\_\_\_  
 CATALOG #: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 NOTES: \_\_\_\_\_

# AB Bollard LED Luminaire Gen 1



## PERFORMANCE INFORMATION



SERIES NUMBER	WATT	LUMENS	CCT
AB 30 G1 FSK	26W	2500	Selectable 3000K 4000K 5000K

The **AB Bollard LED Luminaire Gen 1** features a round flat top with 360° even light distribution that is ideal for illuminating building entryways, pathways, and pedestrian plazas, as well as applications that require a low mounting height light source with full cutoff illumination. This robust luminaire is weather resistant with a sturdy concrete base installation to provide structural support from all directions.

### APPLICATIONS

Building Entryways, Pathways, Pedestrian Plazas, and any location requiring a low mounting height light source.

### REPLACEMENT

50W MH

## ORDERING GUIDE

EXAMPLE: AB 30 G1 FSK

Luminaire Type	Lumen Output	Generation	Voltage	CCT	Finish	Options
<b>AB</b> =Bollard LED Luminaire	<b>30</b> =2500 Lumens	<b>G1</b>	<b>BLANK</b> = 120-277V	<b>FSK</b> = 3000K/4000K/5000K	<b>BLANK</b> =Dark Bronze	<b>BLANK</b> =No Option <b>EL UNV-8W</b> = Emergency Backup Controller

Due to continuous product improvements, specification and/or equipment updates may change without notice.

## SPECIFICATIONS

### HOUSING

Sealed die-cast aluminum housing

### LUMINAIRE AMBIENT TEMPERATURE

Suitable for use in -40°C to 40°C (-40°F to 104°F)

### EMERGENCY BATTERY AMBIENT TEMPERATURE

Suitable for use in 10°C to 40°C (50°F to 104°F)

### INSTALLATION

Mounting includes concrete bollard base and anchor bolts for sturdy installation.

### EFFICACY

Up to 96 lumens per watt (see individual wattage data).

### CCT AND CRI

Selectable 3000K/4000K/5000K CCT available, 80 CRI.

### OPTICS

Reflective cup gather light and make the coverage of the light larger Annular diffuser with 360° glow soft light around

### WARRANTY

10-year limited warranty. Comprehensive warranty terms can be located on [www.slgus.com](http://www.slgus.com).

### ELECTRICAL

50/60Hz operation with 120-277V input. Optional 1-10V dimming.


### FINISH

Polyester Powder Coat Dark Bronze finish.

### CERTIFICATIONS

UL listed for wet locations. DesignLights Consortium® (DLC) Standard 5.1 qualified luminaire. Please visit [www.slgus.com](http://www.slgus.com) for additional certification information.

## DIMENSIONS

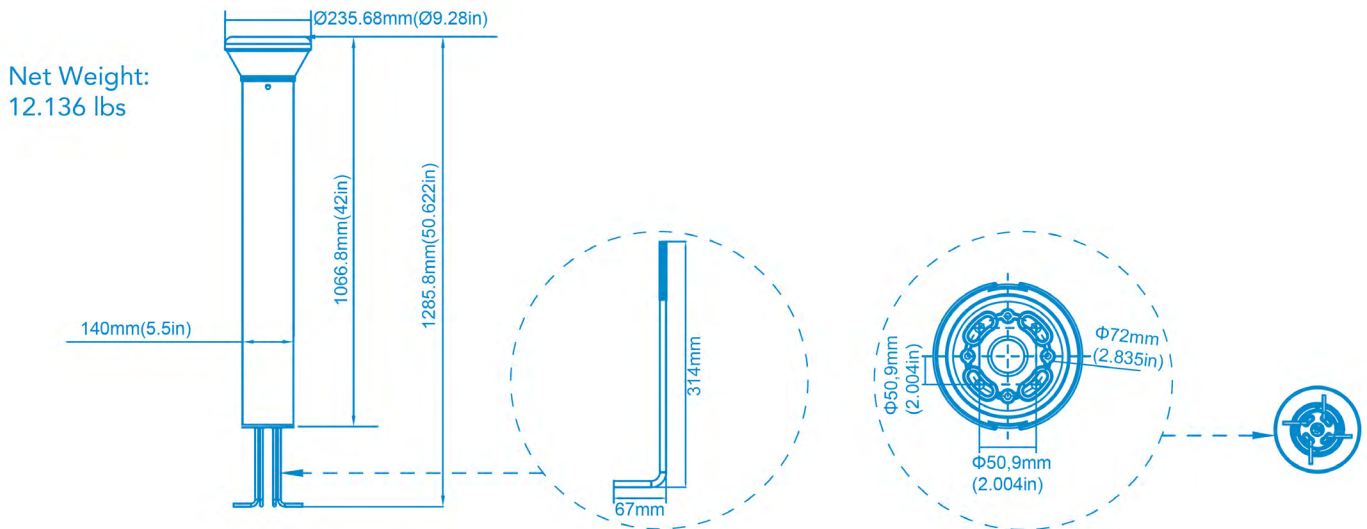

### PERFORMANCE DATA

Series Numbers	Wattage	Lumens	Efficacy	Replaces	Voltage
AB 30 G1 FSK	26W	3000	115 Lm/W	50W MH	120-277V

### ELECTRICAL LOAD

Number of Drivers	Driver Current (mA)	Wattage	Current (A)			
			120V	208V	240V	277V
1	670	26W	0.22	0.13	0.11	0.09

Due to continuous product improvements, specification and/or equipment updates may change without notice.