

FEATURES

- UL924 listed for factory and field installation
- Easy wiring: directly connect to AC INPUT OF LED luminaires
- Constant power output
- High Voltage Input : 277-480V AC
- Self testing monthly/yearly
- Meets or exceeds all NEC, IBC, and Life Safety Code Emergency Lighting Requirements
- Suitable for use in dry, damp and wet locations.
- Built-in lithium battery
- RoHS Compliant
- IP65 waterproof

CERTIFICATES



APPLICATIONS


LED Linear High Bays - HVU 277-480VAC




HCL



HEC/HE




HL

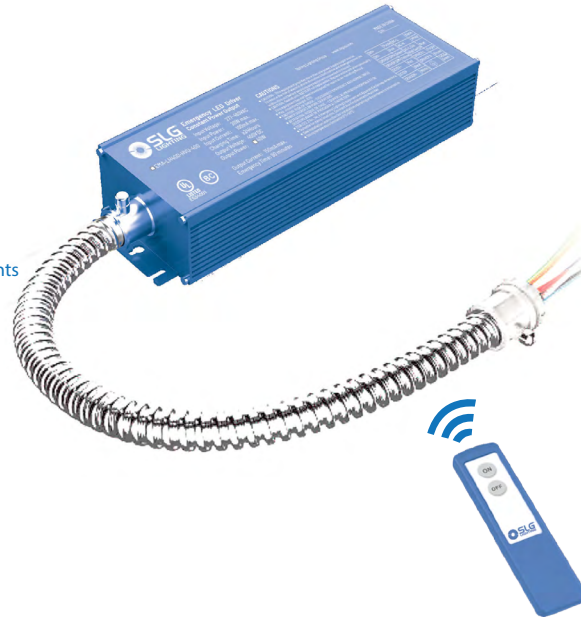

DIMENSION

30W/40W : L*W*H=319x77x46.8mm(12.60"x3.03"x1.84"), mounting center 301mm(11.85")
 60W : L*W*H=370x77x46.8mm(14.57"x3.03"x1.84"), mounting center 351mm(13.82")

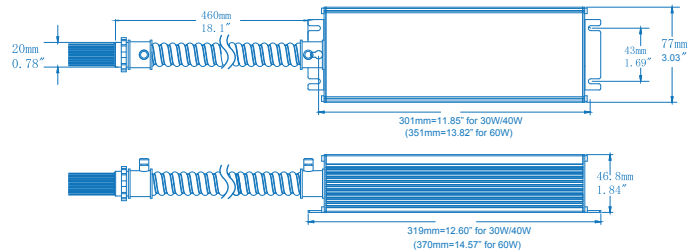

PRODUCT ADVANTAGES

Easy Wiring

Directly connect to AC Input of LED Fixtures. Saves Time and Money on the Jobsite

CEC Title 20 Compliant

High efficiency performance meet CA Title 20 battery charge efficiency standards

Constant Power Performance

Constant wattage delivery maintains illumination level for the full emergency runtime with no degradation

Self-Testing

Monthly and annual self-test features satisfies the periodic testing requirements in accordance with NFPA 101 while the on-board diagnostics provides system readiness with visual indicators.

SPECIFICATIONS


Input Voltage	277-480V AC, 50/60Hz	Output Voltage	400V DC
Input Current	100mA max.	Output Current	≤150mA
Input Power	20W max.	Output Power	30W/40W/60W
Emergency Time	90 minutes	Battery Type	Lithium ion
Charging Time	≥24 hours	Ambient Temp	5 C~50 C

WIRING DIAGRAM



IMPORTANT

Emergency Driver Dim+ (Green) , Driver Dim- (Yellow) has to connect with LED driver DIM+ and DIM- Will NOT operate if not connected.

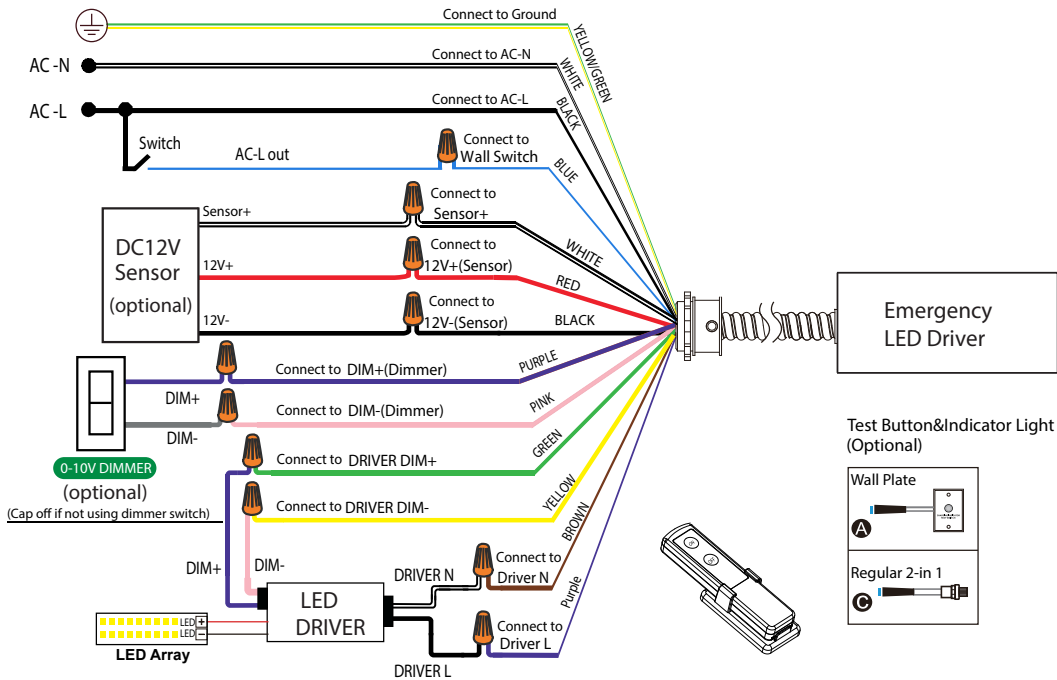

Note: For 277-480VAC 0-10V dimmable LED FIXTURES with an input power less than 300W

OPERATION

AC Operation: AC power is present. The AC driver operates the LED load as designed. The emergency driver is charging in a standby mode. The charging indicator will be lit, showing that the battery is charging.

Emergency Operation: When the AC power goes out, the emergency driver detects the AC power outage and automatically switch to emergency mode. When red LED light is OFF, that means driver is discharging. When the AC power is restored, the emergency driver goes back to AC power and starts recharging.





Indicator Light Introduction

- ① RED / ON: Charging
- ② RED / OFF: Discharging



Remote Controller Introduction

- ON** Press the ON button to test emergency function. This light will switch to its emergency lighting mode and the indicator light will turn off. Press the OFF button, the light will revert to normal lighting mode.
- OFF** When main power supply is OFF (emergency mode), press the OFF button to turn off emergency function.



Note: Remote must be pointed at the indicator light and be within a 45 degree angle to send signal to LED emergency driver. Remote controls requires two AAA batteries to operate. Batteries are not included.



IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following

PLEASE READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

CAUTION: RISK OF SHOCK-disconnect emergency and normal input power sources before servicing

ASSEMBLY and FIELD INSTALLATION WIRING: WARNING: AC power must be off before proceeding with assembly or installation of emergency driver.

IMPORTANT: An un-switched AC power source is required(277-480Vac). It is designed for fixtures listed for dry and damp locations

IMPORTANT: Customers are advised to charge emergency LED driver 24 hours every 6 months during storage.

CAUTION: Make sure all electrical connections conform to the National Electrical Code and all applicable local regulations.

CAUTION: This is a sealed unit. Components are not replaceable. Replace the entire LED Emergency Backup unit when necessary.

CAUTION: Equipment should be mounted in locations and at heights where it is not be subjected to tampering by unauthorized personnel.

CAUTION: The use of accessory equipment is not recommended by the manufacturer and may cause an unsafe condition.

CAUTION: Use with grounded, UL Listed, dry or damp location rated fixtures. Case should also be grounded.

CAUTION: Battery is rechargeable Li-ion type and must be recycled or disposed of properly

CAUTION: Suitable for use in 5°C -50°C ambient temperatures

CAUTION: This product is for use in indoor fixtures only. Do NOT use near heated air handling outlets or hazardous locations..

Do not let power supply cords touch hot surfaces. Do not mount near gas or electric heaters. Do not use this equipment for other than its intended use. Failure to follow this may cause an unsafe condition and will void warranty. Servicing of this equipment should be performed by qualified personnel only.