


PROJECT:	_____
CATALOG #:	_____
FIXTURE TYPE:	_____
NOTES:	_____



Wall Stations

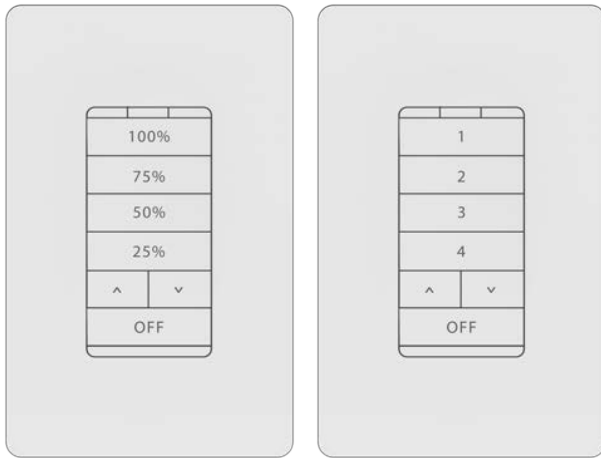

Options

- Battery powered with 10+ year battery life
- AC 100-277V version
- 4 buttons plus trim up/down and OFF
- Software configurable 4 Button Scene control and Dimming wall station configurations
- Replaceable button faces
- Fits standard Decora wall box and multi gang trim plates
- Screwless cover plate also provided

Specifications

- Indoor use only (spray resistant cover plate available for food service applications)
- Operating Temp: 32 to 104°F (0 to 40°C)
- 10+ year battery life with replaceable batteries
- AC version includes load line air gap disconnect for wired retrofits
- UL Listed

Easy, Quick Networking with Wireless Wall Stations

With AC and battery-powered options, Avi-on Wall Stations are available for new construction and retrofit needs. All controls interface to lighting fixtures and with the Avi-on App, providing a platform that supports easy-to-change grouping, scheduling, timers, and scenes.

Controllers

Name	Description	Part Number
Scene Controller (AC)	Avi-on Scene Controller AC with 1-4 buttons	2401AC
Scene Controller (Battery)	Avi-on Scene Controller Battery with 1-4 buttons	2402BAT
Dimming Wall Station (AC)	Avi-on Scene Controller AC with 25/50/75/100% dimming buttons	2401AC-2
Dimming Wall Station (Battery)	Avi-on Scene Controller Battery with 25/50/75/100% dimming buttons	2402BAT-2

DETAILED SPECIFICATIONS

AC Version

Electrical	Min	Max	Unit
Input Voltage	110	277	V
Input Frequency	47	63	Hz

Power Wires	Green	Red	White	Black
16 gauge	GND	Load	Neutral	Line

Battery Version

Battery	Description
Estimated Battery Life	10 year
Battery Type	CR123A*2 (Lithium)

Both Versions

Combined Specifications	Min	Max	Unit
Operating Temperature	-30	70	°C
Storage Temperature	-30	70	°C

Certifications

Regulatory	Description
USA	FCC: 20544-AVI1010B
Canada	IC: 20544-AVI1010B
UL	3MWZ, 2415AC, 2402BAT, E496908

DIMENSIONS

