

# Zone Controller

## 20A Zone Controller

### Description:

A 20A Zone Controller which provides much higher power load than the standard fixture controller. Download our SLG Sync app on IOS/android for easy commissioning, convient controls, and a total lighting network experience.



### Features:

- Up to a 20A relay.
- External 0-10V dimming port allows sink current 48.5mA.
- Check [www.slgus.com/slg-sync](http://www.slgus.com/slg-sync) for SLG Lighting fixture compatibility.
- 5 Year Warranty



**ZCB-AC-04**  
Power Pack

### Ordering Information:


#### Power Pack

Product Number	Description
ZCB-AC-04	Zone Controller 120-277V 20A

### Specifications

<b>Input Voltage</b> AC120-277V	<b>Input Power</b> 2400W Max @ 120V 5540W Max @ 277V	<b>Output Power</b> 2400W Max @ 120V 5540W Max @ 277V	<b>Dimming</b> Class 2, 0-10V DC 10mA Max	<b>Warranty</b> 5 Year warranty
<b>Frequency</b> 50/60 Hz	<b>Output Voltage</b> AC120-277V	<b>Sinking Current</b> 48.5mA Max	<b>Bluetooth Transmit</b> 200 ft. Max.	<b>IP Rating</b> IP20
<b>Input Current</b> 20A Max	<b>Output Current</b> 20A Max	<b>Operating Temperature</b> -30°C to 55°C (-22°F to 131°F)	<b>Radio Frequency</b> 2.4GHz +- 75MHz	

### App Download:

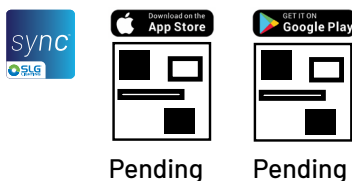

Pending

Pending


### Commissioning:

SLG Sync mobile App is the easiest way to pair devices, create groups, set scenes, set schedules, dimming, color tuning, and adjust high trim based on needs.

Visit [www.slgus.com/slgsync](http://www.slgus.com/slgsync) for How-to-Videos and a comprehensive commissioning guide.




## Dimensions

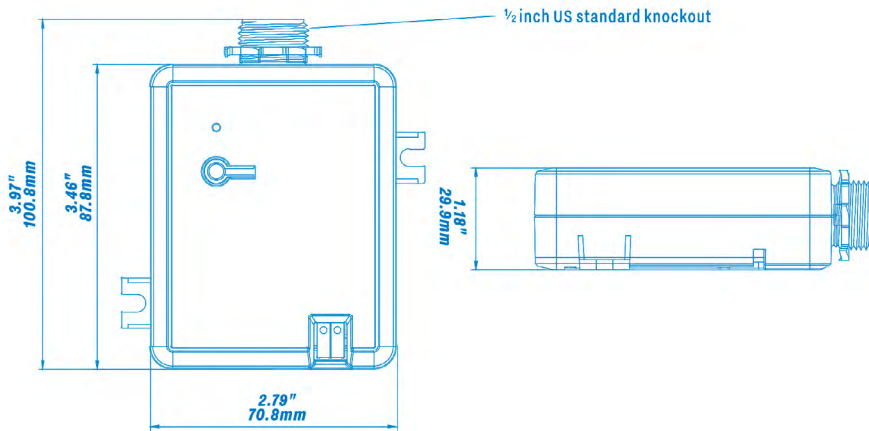

American Inch Products		
Size	T.P.I	Major Dia.
	Inch	Inch
R1/2	14	0.825

## Wiring

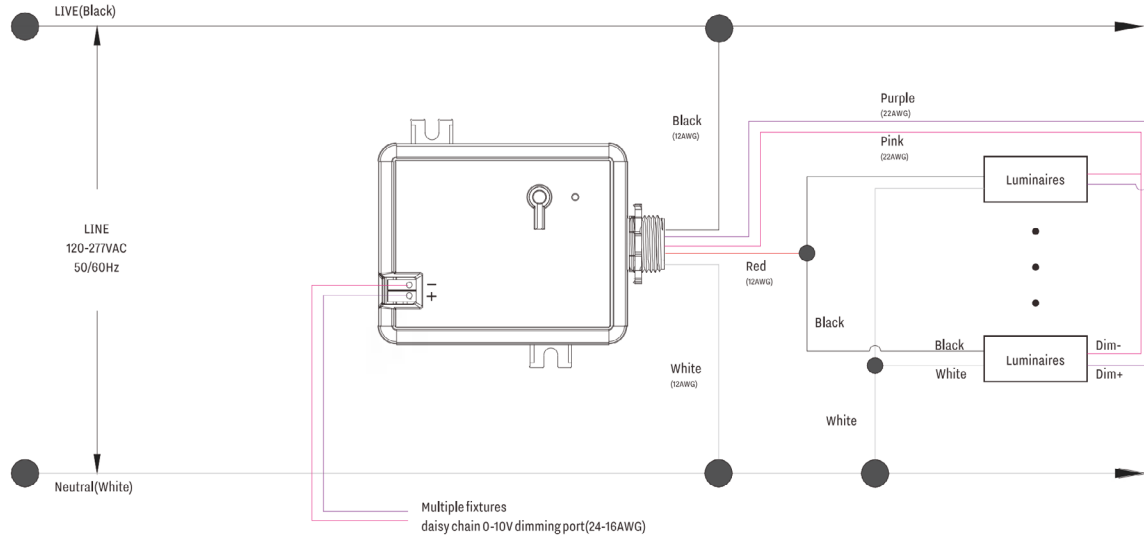

Due to continuous product improvements, specification and/or equipment updates may change without notice.