

PROJECT:	_____
CATALOG #:	_____
FIXTURE TYPE:	_____
NOTES:	_____

# SVI G2 Suspending Vertical Linear




The *SVI Suspending Vertical Linear Gen 2* is a beautifully designed LED luminaire that offers optimal distribution for low glare and a wide beam angle. This minimalist luminaire can be installed individually or combined to create a row of continuous illumination. This luminaire allows for step dimming and features selectable color temperatures 3000K, 3500K, and 4000K.



## APPLICATIONS

Airport, Education, Healthcare, Hospitality, Retail, Executive Conference Rooms, Commercial Office Spaces, and any open spaces that require a unique and elegant architectural lighting design.

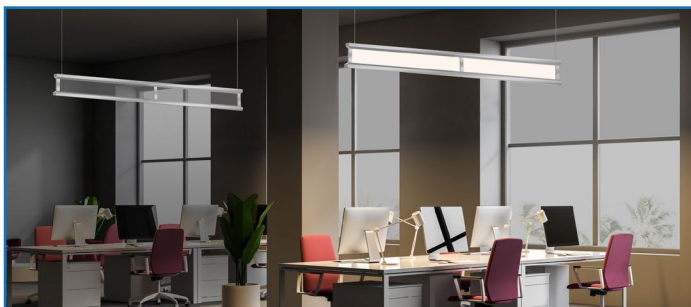

## SPECIFICATIONS

### HOUSING

The body is made of precision machined and extruded anodized aluminum.

### AMBIENT TEMPERATURE

Suitable for use in 0°C to 40°C (32°F to 104°F)

### MOUNTING

Pendant mounting for drywall and drop ceiling

### EFFICACY

40W: 100lm/W

### ELECTRICAL

High quality constant current drivers rated for 50/60Hz. Operation 120-277V input. Standard 1-10V dimming.

### CCT AND CRI

3000K, 3500K, and 4000K Selectable CCT; 80 CRI

### OPTICS

High transmitting acrylic PMMA lens with bottom diffuser lens.

### FINISH

Aluminum Silver finish

### WARRANTY

5-year limited warranty. Please visit [www.slgus.com](http://www.slgus.com) for complete warranty terms.

### CERTIFICATIONS

UL Listed for damp locations.

Due to continuous product improvements, specification and/or equipment updates may change without notice.

## ORDERING GUIDE

EXAMPLE: SVI 4 40 G2 FSK

Luminaire Type	Fixture Length	Lumen Output	Generation	Voltage	CCT	Finish	Ceiling Plan
<b>SVI</b> Suspended Vertical Linear	<b>4=</b> 4 feet	<b>40</b> 4,000 Lumens	<b>G2</b>	<b>BLANK=</b> 120-277V	<b>FSK</b> Selectable CCT (3000K, 3500K, 4000K)	<b>BLANK=</b> Aluminum	<b>E=</b> Dry Wall (Mount to J-box) <b>T1=</b> Drop Ceiling Clips (Suitable for 9/16" and 15/16" Flat Ceiling) <b>T2=</b> Drop Ceiling Clips (Suitable for 9/16" Slot Ceiling) <b>T3=</b> Drop Ceiling Clips (Suitable for 15/16" Slot Ceiling)

### ADVANCED WIRELESS CONTROL

**AVI-XFAC-16A-1CH-CL1** Line Voltage Single Channel Bluetooth Controller, 15A Relay, Class I

**AVI-XFAC-16A-1CH-CL1-DC-PIR** Line Voltage Single Channel Bluetooth Controller, 15A Relay, Class I PIR Sensor (Ceiling Mount Required)

## RECOMMENDED REPLACEMENT & MOUNTING HEIGHT

WATTAGE	LUMENS	MOUNTING HEIGHT
40W	4,000 Lm	8' - 12'

Due to continuous product improvements, specification and/or equipment updates may change without notice.

## MOUNTING ACCESSORIES

### CANOPY SIZE & SHAPE



1.6in Round



4.5in Round  
Designed for  
power cable



4.5in Round  
w/EM indicator


### MOUNTING STYLES



Drywall Ceiling  
w/ Internal Driver




Drywall Ceiling  
w/ External Driver &  
EM indicator



#### T-Grid Clips

Suspends luminaire in T-grid.  
Compatible with 9/16" and 15/16" Flat,  
9/16" and 15/16" Slot Ceiling Types.

## DIMENSIONS



Due to continuous product improvements, specification and/or equipment updates may change without notice.



## PERFORMANCE DATA

Wattage	Voltage	3000K		3500K		4000K	
		Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
40W	120-277V	3,880	97	3,960	99	4,000	100

## ELECTRICAL LOAD

WATT	Current (A)			
	120V	208V	240V	277V
40W	0.33	0.19	0.17	0.14

## PHOTOMETRIC

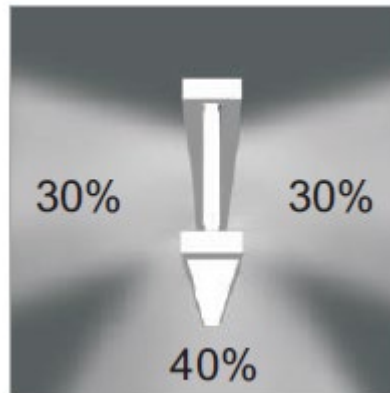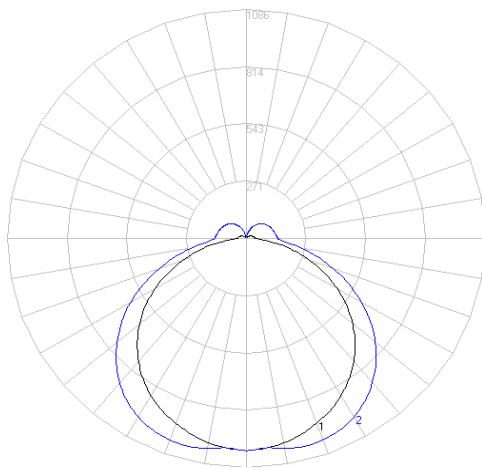

Due to continuous product improvements, specification and/or equipment updates may change without notice.