

# TR Select G2

## LED Selectable Wraparound Gen 2 **CONTRACTOR XP**

Due to continuous product improvements, specification and/or equipment updates may change without notice.



(Images are shown for illustration purposes only)

### TR 4 35/45/55 G2 FSK

The TR 4 35/45/55 G2 FSK Selectable LED wraparound is a contractor experience lighting solution designed to save you money, save you time, and install quickly. 9 fixtures in 1 - 3 selectable lumen outputs for different ceiling heights/applications and 3 selectable CCT color outputs. Lightweight for easy installation - engineered with your experience first.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
TR 4 35/45/55 G2 FSK	LED Surface Wraparound - Second Generation	Selectable 3,800 - 5,300 Lm	Selectable 28 - 40 W	Selectable 3500K - 5000K	120V - 277V

## ORDERING GUIDE

Example: TR 4 35/45/55 G2 FSK

Fixture Type	Size	Selectable Lumen Output	Gen	Voltage	Selectable CCT	Finish	Accessories
• TR LED Surface Wraparound	• 4 4 foot	• 35/45/55 3,800 Lm / 28 W 4,500 Lm / 34 W 5,300 Lm / 40 W	• G2 Second Generation	• BLANK 120-277 V	• FSK 3500K 4000K 5000K	• BLANK White	<ul style="list-style-type: none"> <li>• BLANK None</li> <li>• BR1819P-B-D PIR Motion/Photo Sensor, 120 - 277V AC, 1-10 Dimming</li> <li>• L1 360° Lens (Max. 25 ft. mounting height)</li> <li>• L2 360° Lens (Max. 40 ft. mounting height)</li> <li>• EMD-SH08D-UNV-056 Emergency Backup 8W</li> <li>• TR-VHOOK V-Hook Mounting 1 set (2 pcs)</li> </ul>

# TR Select G2



## Specifications

### Housing

Fabricated 22 ga steel.

### Ambient Temperature

Suitable for use in -20° C to 50° C (-4° F to 122° F).

### Mounting

Surface mounting and V-Hook ready.

### Efficacy

Up to 138 lumens per watt.

### CCT and CRI

Field selectable: 3500K, 4000K, and 5000K 80+ CRI

### Lumen Output

Field selectable: 3,800 - 5,300 Lm.

### Warranty

5-year limited warranty. Comprehensive warranty terms can be located on [www.slgus.com](http://www.slgus.com).

### Electrical

Standard 120V - 277V 0-10V Dimming

### Certifications

UL Listed for damp locations. FCC compliant. Design Lights Consortium® (DLC) 5.1 listed.

## Performance Information

Series Number	Power Percentage	Wattage	3500K	4000K	5000K
			Lumens	Lumens	Lumens
TR 4 35/45/55 G2 FSK	100%	40 W	5,200 Lm	5,240 Lm	5,280 Lm
	85%	34 W	4,522 Lm	4,556 Lm	4,590 Lm
	70%	28 W	3,808 Lm	3,836 Lm	3,864 Lm

## Electrical Load

	Power Setting	Wattage	Current (A)			
			120V	208V	240V	277V
TR 4 35/45/55 G2 FSK	High	40 W	0.34	0.19	0.17	0.14
	Med	34 W	0.28	0.16	0.14	0.12
	Low	28 W	0.23	0.13	0.12	0.1

## Dimensions

### TR 4 35/45/55 G2 FSK


46.0" / 1168.6

#### Height:

3.4" / 86.7 mm

#### Weight:


7.56 lbs

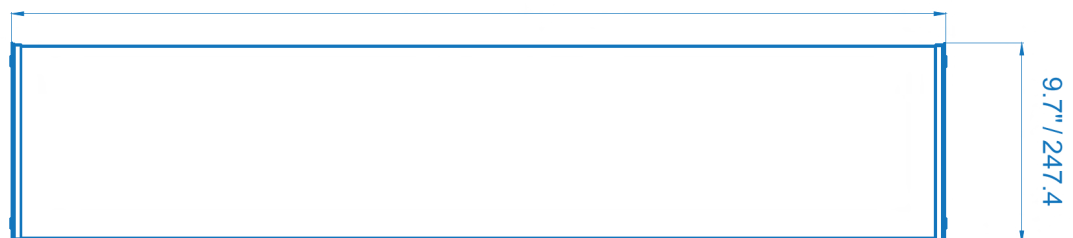

# TR Select G2



## Photometric

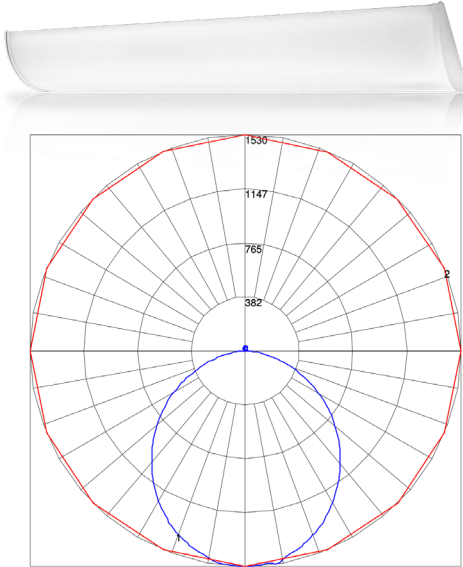


**TR 4 35/45/55 G2 FSK**  
 Selectable Settings  
 High - 5,300 LM - Wattage (40W)  
 CCT setting 3500K

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-20	556.87	11.50
0-30	1175.19	24.20
0-40	1909.98	39.30
0-60	3346.81	68.90
0-80	4283.24	88.20
0-90	4522.01	93.10
10-90	4377.31	90.10
20-40	1353.11	27.90
20-50	2106.6	43.40
40-70	1985.47	40.90

ZONE	LUMENS	%FIXT
60-80	936.43	19.30
70-80	387.79	8.00
80-90	238.77	4.90
90-110	210.52	4.30
90-120	248.76	5.10
90-130	271.96	5.60
90-150	308.97	6.40
90-180	335.96	6.90
110-180	125.44	2.60
0-180	4857.97	100.00

## Shipping Information

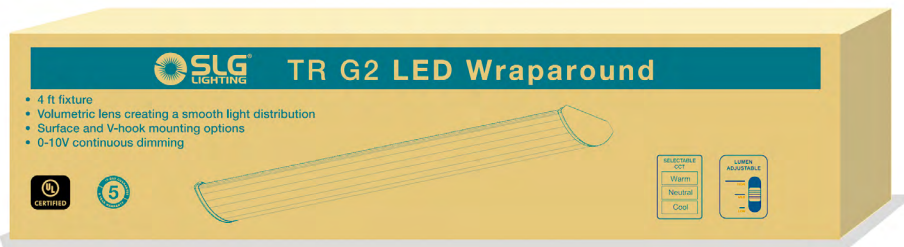

Box render shown for marketing purposes only.

Product number	Individual box size	Individual box weight
<b>TR 4 35/45/55 G2 FSK</b>	48" X 10.9" X 4"	8.7 lbs