

PROJECT: _____
 CATALOG #: _____
 FIXTURE TYPE: _____
 NOTES: _____

TRC Selectable Surface Wraparound Contractor Series Gen 1



TRC 4 ft

The *TRC Selectable Surface Wraparound Contractor Series Gen 1* features a clean low-profile wraparound design with decorative end caps and a frosted lens. Unobtrusive and efficient, this luminaire provides widespread, uniform illumination that is ideal for many applications including corridors, hallways, kitchens, etc. This is available in 4 ft with selectable lumen packages between 3,950 to 5,600 lumens and selectable color temperatures 3500K, 4000K and 5000K.



APPLICATIONS

Commercial and Retail spaces including Offices, Conference rooms, Corridors, Utility rooms, etc.

SPECIFICATIONS

HOUSING

Metal housing with decorative plastic end caps.

AMBIENT TEMPERATURE

Suitable for use in -20°C to 50°C (-4°F to 122°F)

MOUNTING

Surface mount

EFFICACY

Up to 123 lumens per watt (see individual wattage data)

CCT AND CRI

Selectable 3500K, 4000K, and 5000K CCT available; 80 CRI

OPTICS

White frosted diffuser

WARRANTY

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

ELECTRICAL

50/60Hz operation with 120-277V input. Optional 0-10V dimming.

FINISH

White Polyester Powder coat finish.

CERTIFICATIONS

UL Listed for damp location. Design Lights Consortium® (DLC) Standard 5.0 qualified product. Not all versions of this product may be DLC qualified. Please visit www.slgus.com to confirm which versions are qualified.

OPTIONS




HBP-112-L7-OEM

ORDERING GUIDE							EXAMPLE: TRC 4 40/50/55 G1 FSK
Luminaire Type	Size	Lumen Output	Generation	Voltage	CCT	Finish	Options
TRC Selectable Surface Wraparound Contractor Series	4=4 ft	40/50/55= 3,950/4,800/5,600 Lumens	G1	BLANK= 120-277V	FSK= 3500K/4000K/5000K	BLANK= White	BLANK= No Option M1 (HBP-112-L7-OEM) = High/Low-Bay PIR On/Off Sensor M2 (BRI819P-B-D-L1) = PIR indoor Motion/Photo dimming sensor


Due to continuous product improvements, specification and/or equipment updates may change without notice.

DIMENSIONS

Weight: 3.75 LB
Depth: 2.1"

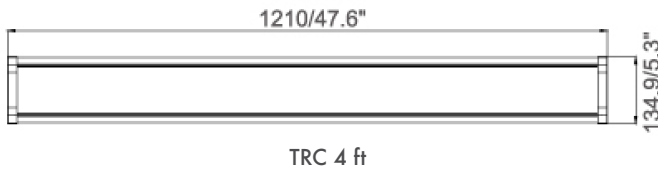

PHOTOMETRIC DATA

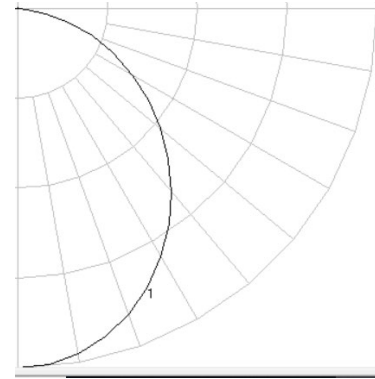

TRC 4 40/50/55 G1 FSK

PERFORMANCE DATA

Selectable Wattage	Voltage	3500K	4000K	5000K	T5 Lamp	T8 Lamp	Mounting Height
		Lumens	Lumens	Lumens	Replacement	Replacement	
32W	120-277V	3,872	3,904	3,936	2 Lamp F24T5/HO	2 Lamp F17T8	8-12'
40W	120-277V	4,720	4,760	4,800	2 Lamp F28T5	2 Lamp F28T8	8-12'
48W	120-277V	5,520	5,568	5,616	2 Lamp F35T5	2 Lamp F32T8	8-12'

ELECTRICAL DATA

Watt	Current (A)			
	120V	208V	240V	277V
32W	0.27	0.15	0.13	0.12
40W	0.34	0.20	0.16	0.14
48W	0.40	0.23	0.20	0.18

Due to continuous product improvements, specification and/or equipment updates may change without notice.