






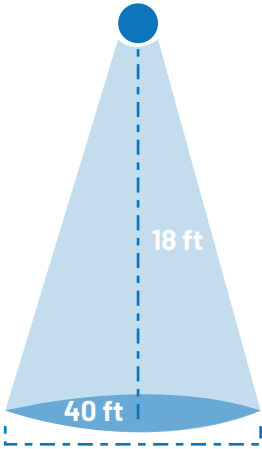





FIXTURES	COMPATIBLE SLG SYNC™ PRODUCT	SPECS	INSTALLATION STEPS
 HEC Select   HFO Select	 <b>MSB-DCE-06</b>   <b>FCB-DCE-06</b>	 <p><b>Mounting Height:</b> 20 - 40 ft</p> <p><b>Diameter/Detection Range:</b> 40 - 80 ft</p> <p><b>IP Rating:</b> IP66 - Indoor/Outdoor</p> <p><b>Input Voltage:</b> DC 12V</p> <p><b>Dimming:</b> Class 2 0-10V DC 10mA Max.</p>	<p>Unscrew the plug on the housing.</p>  <p>Carefully screw in to built in receptacle.</p> 
 HL   HE   HCL	 <b>MSB-ACI-01</b>   <b>MSB-ACE-04</b>		<p>Use tool to remove knock out on housing. (Side or bottom knock out depending on sensor)</p>  <p><b>MSB-ACE-04</b></p>  <p><b>MSB-ACI-01</b></p>  <p>Lens</p>
 HC   HR   HX	 <b>MSB-ACI-01</b>		<p>Use tool to remove knock out on housing. (Side or bottom knock out depending on sensor)</p>   <p>Lens</p>
 VLB   VTC   VT	 <b>MSB-ACE-04</b>		<p><b>Mounting Height:</b> 20 - 40 ft</p> <p><b>Diameter/Detection Range:</b> 32 - 80 ft.</p> <p><b>IP Rating:</b> IP66 - Indoor/Outdoor</p> <p><b>Input Voltage:</b> AC 120-277V</p> <p><b>Dimming:</b> Class 2 0-10V DC 10mA Max.</p>



FIXTURES	COMPATIBLE SLG SYNC™ PRODUCT	SPECS	INSTALLATION STEPS
 <p>TSC</p> <p>TSS</p>	 <p>SR02</p> <p>MSB-DCE-06</p> <p>FCB-DCE-02</p>	 <p>Mounting Height: 20 - 40 ft</p> <p>Diameter/Detection Range: 40 - 80 ft</p> <p>IP Rating: IP66 - Indoor/Outdoor</p> <p>Input Voltage: DC 12V</p> <p>Dimming: Class 2 0-10V DC 10mA Max.</p>	<p>Use tool to remove knock out on housing.</p>   <p>Install receptacle and plug in motion sensor/controller.</p>
 <p>ALW</p> <p>ALC</p> <p>FFW</p> <p>FFC</p>	 <p>MSB-ACI-01-W</p>	 <p>40 ft Max</p> <p>80 ft Max</p>	<p>Use tool to remove knock out on housing.</p>  <p>Install lens and sensor.</p>  <p>Lens</p>
 <p>AP Select</p>		<p>Mounting Height: 20 - 40 ft</p> <p>Diameter/Detection Range: 32 - 80 ft.</p> <p>IP Rating: IP66 - Indoor/Outdoor</p>	<p>Drill 1" standard hole in housing.</p>  <p>Install lens and sensor.</p>  <p>Lens</p>
 <p>CSC Select</p>	 <p>MSB-ACE-04</p>	<p>Input Voltage: AC 120-277V</p> <p>Dimming: Class 2 0-10V DC 10mA Max.</p>	<p>Unscrew plug for threaded receptacle.</p>  <p>Hand tighten and connect.</p> 
 <p>PG</p>	 <p>MSB-ACI-01</p>		<p>Use tool to remove knock out on housing. (Side or bottom knock out depending on sensor)</p>  <p>Install lens and sensor.</p>  <p>Lens</p>



FIXTURES	COMPATIBLE SLG SYNC™ PRODUCT	SPECS	INSTALLATION STEPS
 TSB   TDB   TDBR   TPB	 <p>MSE-DCI-08</p>	 <p><b>Mounting Height:</b> 18 ft, Max</p> <p><b>Diameter/Detection Range:</b> 40 ft. Max</p> <p><b>IP Rating:</b> IP20 - Indoor Only</p> <p><b>Input Voltage:</b> DC 12V</p> <p><b>Dimming:</b> Class 2 0-10V DC 10mA Max.</p>	 <p>Remove the plastic cap on the fixture housing using a flat edge tool.</p>  <p>Push connect the sensor using the now accessible wiring.</p>  <p>Push-snap the sensor into the housing. Sensor is now ready for commissioning.</p>

## YOUR TIME MATTERS!

Subscribe to our YouTube channel for all the latest on wireless lighting controls & installation videos.

Scan the QR code to access all you need to get started today!





Your experience matters.

---

Sales: 713-389-5680 or [Sales@slgus.com](mailto:Sales@slgus.com)

SLG Sports Lighting: 903-407-0555 or [chandler.hancock@slgus.com](mailto:chandler.hancock@slgus.com)

Marketing: [Marketing@slgus.com](mailto:Marketing@slgus.com)

---

